

DESCRIPTION

The Policharger KSIX NW-T2 single-phase 7.4 kW car charger has been manufactured and developed by Policharger, and features an intuitive installation and use to optimise the charging of the electric vehicle. The power adjustment is done automatically. It has been designed to adapt to the charging needs of any vehicle, making the most of the power available in the installation. It stands out for its durability and optimum operation both indoors and outdoors.

Includes 5m single-phase Mode 3 charging cable with Type 2 connector.

Protections are not included.

The quickest and easiest installation

The Policharger KSIX NW-T2 has an incredibly simple installation system whose fixing system requires no more than a single screw, while maintaining a robust anchorage. It also allows the integration of all the protections inside (not included) and reduces start-up times thanks to the most intuitive configuration!

Power programming

Program the power according to the time of day (off-peak and peak) and optimise your vehicle's charge.

Automatic power regulation

The Policharger NW-T2 charger allows you to adjust the charging power up to 7.4 kW at any time to the available power of the home without exceeding the maximum contracted power thanks to the integrated sensor that measures the consumption of the household. This sensor transmits this information to the equipment in order to control the current provided by the meter in real time. In this way, you can avoid the dreaded power cuts due to exceeding the contracted power and have a faster and more efficient charge.

Smart power distribution (SPL)

In installations with more than one Policharger, the units can communicate with each other to share the power available at any given moment. One unit can operate as a Master and measure the total consumption of the installation to send the power setpoint that can be consumed by the other units, or it can also operate as a Modbus slave.

LCD Display

Keypad panel menu with LCD display that provides information about charging intensity, energy consumed and charging status information.

Compatibility



Incorporates a 5 m female T2 socket connector.

Maximum durability

Designed and tested to guarantee maximum resistance and endurance: the KSIX Policharger KSIX charger allows optimal operation both indoors and outdoors.

Locking system

It incorporates an intuitive password and key combination locking system to

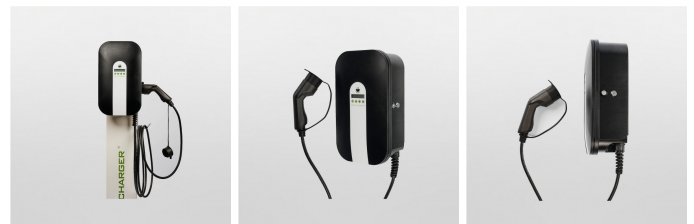

ensure maximum security.

And a host of additional options

This equipment allows the configuration of a wide range of complementary options: integration of the necessary protections according to ITC-BT52 (Differential switch, Circuit breaker and Surge protection) inside and protection against DC leakage, use of solar excess energy or auxiliary Schuco base. Discover all the possibilities that Policharger NW-T2 offers you!

TECHNICAL SPECIFICATIONS.

Weight	6 kg
Dimensions	43.5 x 25.3 x 15 cm
Frequency range	50Hz - 60Hz
Degree of protection	IP65
Power	7.4kW
Wire size	5 m
Connector type	Type 2
Working conditions	Operating temperature: -20° C - 45° C
Reference directives	2014/35/EU, IEC61851-1, IEC61851-22, IEC62196-1
Input power	230 ± 10 %, 1P+N+PE
Impact resistance	IK10
Sensor	Dynamic power management
Power Sharing	Yes

STRENGTHS



POLICHARGER REF. BXWALLPOLNWT2 EAN: 8427542126036

Recommended retail price: €739.90